



RUBBER SHEETING

RUBBER SHEETING

Rubber sheeting in general

Rubber sealing plates as a semi-finished product for further production of sealing and damping parts.

In eight different compositions of rubber compounds, which guarantee specific chemical and physical-mechanical properties: tensile strength, hardness, density, elongation and temperature range.

The range of our sealing plates will meet the needs of even the most demanding client: sealing plates for general use, for mechanical stress, oil-resistant, abrasion-resistant, heat-resistant, food-grade, sound-insulating and PARA rubber. You can choose your preferred combination of features and colors.


Available caoutchoucs

- SBR
- NBR-SBR
- EPDM
- EPDM-NR
- NR
- NR-SBR-BR
- CR-SBR
- CR-NR

Applications

- Different types of seals after cutting / cutting
- Protective curtains for sand
- Rubber for hoppers
- Sound insulation

AVAILABLE COLORS

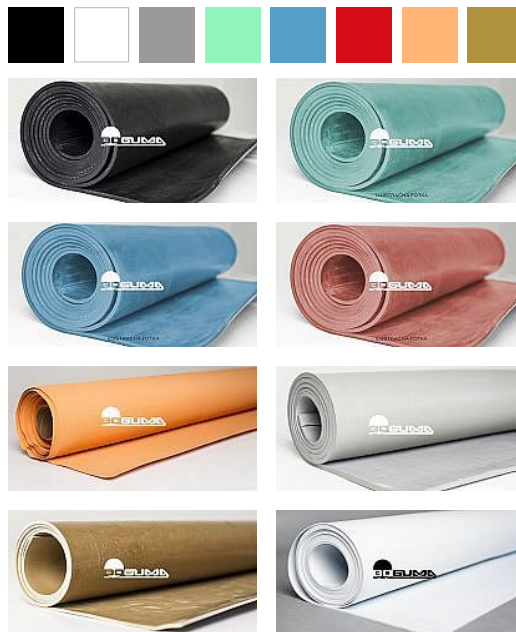

AVAILABLE PROFILES

TD - smooth profile, Pattern S3



Thicknesses from 1 - 15mm.

Possibility of strengthening the internal structure with fabric in 1 or 2 layers.

AVAILABLE APPLICATIONS



| | |
|-------------------|----|
| 7993 — SBR | 4 |
| 7994 — SBR | 5 |
| 7759 — SBR | 6 |
| 9035 — SBR | 7 |
| 7665 — SBR | 8 |
| 7667 — SBR | 9 |
| 7668 — SBR | 10 |
| 7669 — SBR | 11 |
| 7987 — CR-SBR | 12 |
| 7887 — CR-SBR | 13 |
| 7815 — EPDM | 14 |
| 7911 — EPDM | 15 |
| 7795 — EPDM | 16 |
| 7796 — EPDM | 17 |
| 7659 — EPDM-NR | 18 |
| 7661 — EPDM-NR | 19 |
| 7645 — NBR-SBR | 20 |
| 7672 — NBR-SBR | 22 |
| 7689 — NR | 24 |
| 7742 — NR | 25 |
| 7749 — SBR | 26 |
| 7816 — EPDM-NR | 27 |
| 7750 — NBR-SBR-BR | 28 |
| 9001 — CR-NR | 29 |

RUBBER SHEETING FOR GENERAL USE 7993 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 4 | MPa | 1,47 | g/cm ³ | 200 | % | -25 - +80 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING FOR GENERAL USE 7994 — SBR



| | | | | | | | | | | | | |
|-------------|------|---------------------|-----|---------|-------------------|------------|---|----------------------|----|-----------|----|-------------|
| 50 +/- 5 | Sh A | 4 | MPa | 1,5 | g/cm ³ | 400 | % | -25 - +80 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in black color. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING FOR GENERAL USE 7759 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 80 +/- 5 | Sh A | 4 | MPa | 1,55 | g/cm ³ | 100 | % | -25 - +80 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING FOR GENERAL USE 9035 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 6 | MPa | 1,51 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in white color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS


| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING FOR GENERAL USE 7665 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 6 | MPa | 1,53 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in gray. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

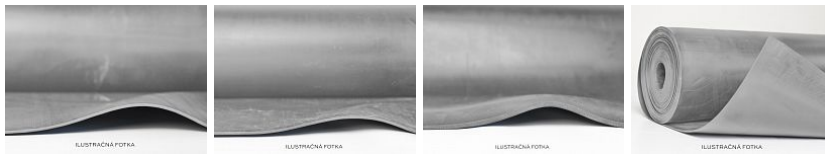

RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS


| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING FOR GENERAL USE 7667 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 6 | MPa | 1,53 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in green color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

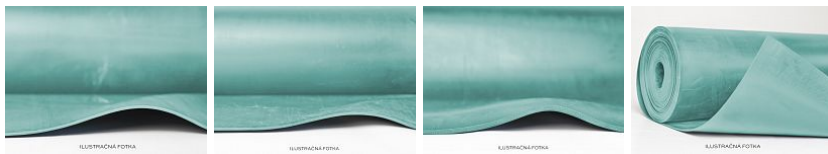

RESISTANCE

| | |
|---------------------|----|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | NO |
| Acid resistance | NO |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS


| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING FOR GENERAL USE 7668 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 6 | MPa | 1,53 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing rubber plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in blue color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

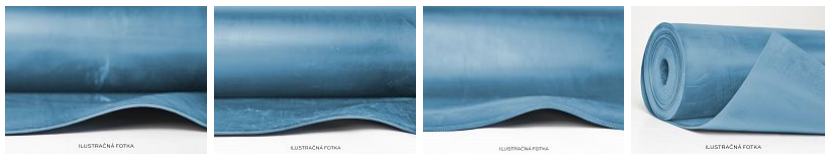

RESISTANCE

| | |
|---------------------|----|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | NO |
| Acid resistance | NO |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RED RUBBER SHEETING FOR GENERAL USE 7669 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 6 | MPa | 1,53 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in red. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

- Weather resistance NO
- Ozone resistance NO
- UV resistance NO
- Alkaline resistance NO
- Acid resistance NO
- Oil resistance NO
- Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING FOR GENERAL USE 7987 — CR-SBR



| | | | | | | | | | | | | |
|-----------------|------|-------------------------|-----|----------------|-------------------|-------------------|---|--------------------------|----|------------------|----|--------------------|
| 65 +/- 5 | Sh A | 8 | MPa | 1,4 | g/cm ³ | 300 | % | -25 - +80 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | MEDIUM RESISTANT |
| Ozone resistance | NO |
| UV resistance | MEDIUM RESISTANT |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Solvent resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING FOR GENERAL USE 7887 — CR-SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 50 +/- 5 | Sh A | 6 | MPa | 1,3 | g/cm ³ | 300 | % | -25 - +80 | °C | 1-6 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | MEDIUM RESISTANT |
| Ozone resistance | NO |
| UV resistance | MEDIUM RESISTANT |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Solvent resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|----------------------------|
| without reinforcement layers | (for thicknesses 1 - 6 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 6 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 6 mm) |

RUBBER SHEETING HEAT RESISTANT 7815 — EPDM



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 60 +/- 5 | Sh A | 10 | MPa | 1,22 | g/cm ³ | 400 | % | -40 - +125 | °C | 1-15 | mm | EXTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING HEAT RESISTANT 7911 — EPDM



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 60 +/- 5 | Sh A | 12 | MPa | 1,14 | g/cm ³ | 400 | % | -40 - +125 | °C | 1-15 | mm | EXTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING HEAT RESISTANT 7795 — EPDM



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 70 +/- 5 | Sh A | 7 | MPa | 1,33 | g/cm ³ | 250 | % | -40 - +100 | °C | 1-15 | mm | EXTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SEALING HEAT RESISTANT 7796 — EPDM



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 80 +/- 5 | Sh A | 7 | MPa | 1,33 | g/cm ³ | 250 | % | -40 - +100 | °C | 1-15 | mm | EXTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING HEAT RESISTANT 7659 — EPDM-NR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 12 | MPa | 1,15 | g/cm ³ | 650 | % | -40 - +125 | °C | 1-6 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM-NR with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|----------------------------|
| without reinforcement layers | (for thicknesses 1 - 6 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 6 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 6 mm) |

RUBBER SHEETING HEAT RESISTANT 7661 — EPDM-NR



| | | | | | | | | | | | | |
|-------------|------|---------------------|-----|---------|-------------------|------------|---|----------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 12 | MPa | 1,15 | g/cm ³ | 650 | % | -40 - +125 | °C | 1-6 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM-NR with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ADDITIONAL INFORMATION

color might be not stable if used outdoor

RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | HIGHLY RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|----------------------------|
| without reinforcement layers | (for thicknesses 1 - 6 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 6 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 6 mm) |

RUBBER SHEETING OIL RESISTANT 7645 — NBR-SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 3 | MPa | 1,65 | g/cm ³ | 200 | % | -25 - +80 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate designed for the environment in which it comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made from a synthetic mixture of NBR-SBR rubbers with suitable properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

- Alkaline resistance NO
- Acid resistance NO
- Oil resistance HIGHLY RESISTANT
- Gasoline resistance MEDIUM RESISTANT

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH


| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING OIL RESISTANT 7645 — NBR-SBR

7645 SWELLING RATES

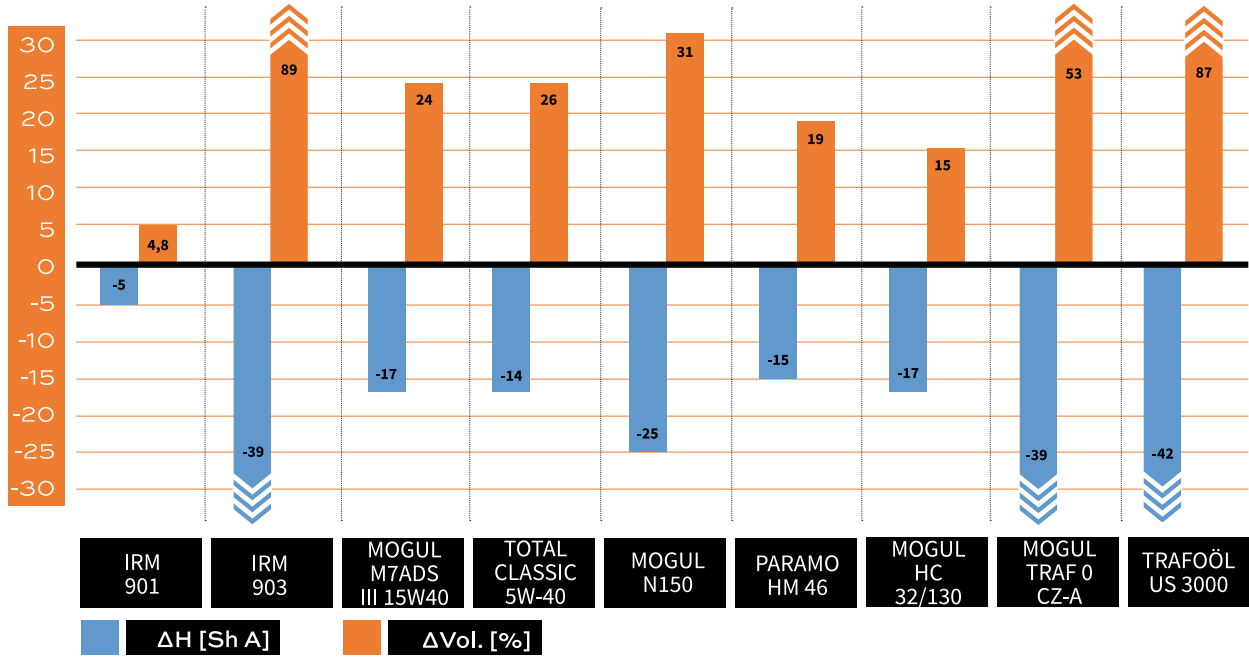

RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR



| | | | | | | | | | | | | |
|-------------|------|---------------------|-----|---------|-------------------|------------|---|----------------------|----|-----------|----|-------------|
| 70 +/- 5 | Sh A | 8 | MPa | 1,3 | g/cm ³ | 250 | % | -25 - +100 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate designed for the environment in which it comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made from a synthetic mixture of NBR-SBR rubbers with suitable properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ADDITIONAL INFORMATION

Temperature range -25/+100 °C

RESISTANCE

| | |
|----------------------------|------------------|
| Alkaline resistance | NO |
| Acid resistance | MEDIUM RESISTANT |
| Transformer oil resistance | HIGHLY RESISTANT |
| Oil resistance | HIGHLY RESISTANT |
| Gasoline resistance | HIGHLY RESISTANT |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH


| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR

7672 SWELLING RATES

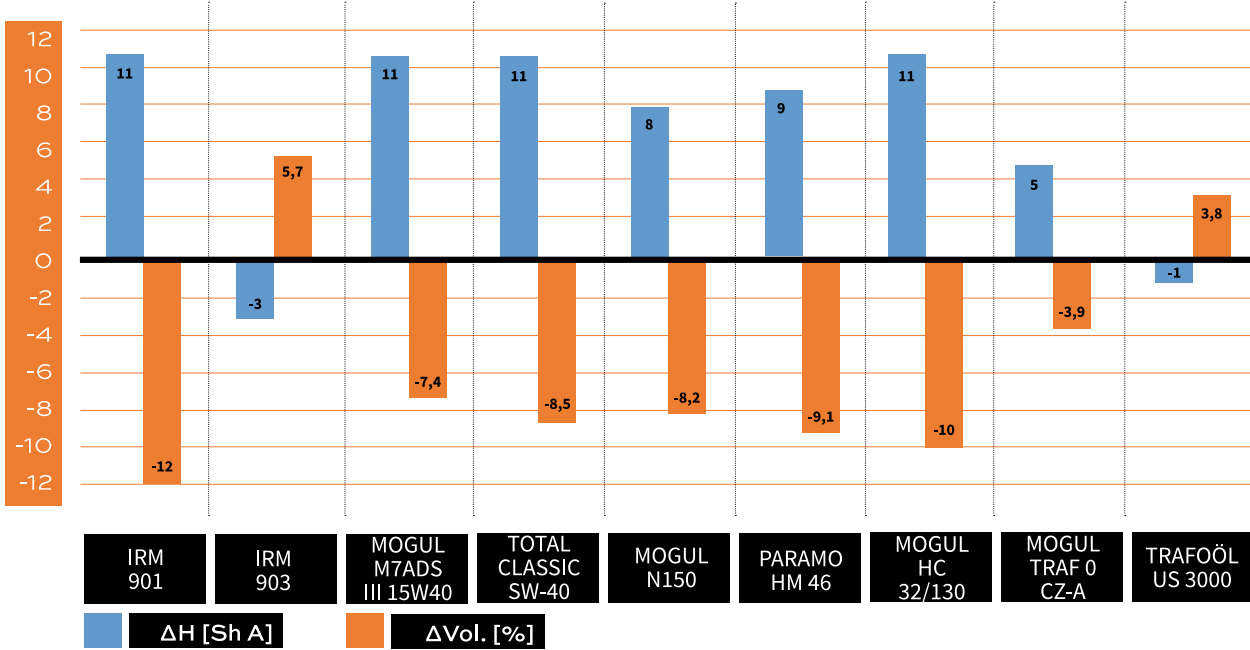


RUBBER SHEETING PARA QUALITY 7689 — NR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 40 +/- 5 | Sh A | 12 | MPa | 1 | g/cm ³ | 600 | % | -25 - +70 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate high-strength and highly elastic with increased abrasion resistance. Made on the basis of natural rubber NR with various physical and mechanical properties. With the possibility of specifying the thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

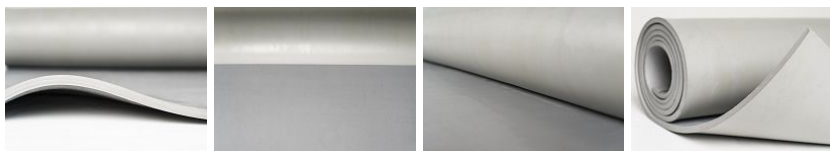

RESISTANCE

| | |
|---------------------|------------------|
| Abrasion resistance | HIGHLY RESISTANT |
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,8 mm) |
| 10 mm | (+/- 0,8 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
|------------------------------|-----------------------------|

RUBBER SHEETING PARA QUALITY 7742 — NR



| | | | | | | | | | | | | |
|-----------------|-------------|-------------------------|------------|----------------|-------------------------|-------------------|----------|--------------------------|-----------|------------------|-----------|--------------------|
| 40 +/- 5 | Sh A | 12 | MPa | < 1,00 | g/cm³ | 500 | % | -25 - +70 | °C | 1-6 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate high-strength and highly elastic with increased abrasion resistance. The density of 7742 is less than 1 g / cm³, which means that it is a lighter material than water. Made on the basis of natural rubber NR with various physical and mechanical properties. With the possibility of specifying the thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Abrasion resistance | HIGHLY RESISTANT |
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|----------------------------|
| without reinforcement layers | (for thicknesses 1 - 6 mm) |
|------------------------------|----------------------------|

RUBBER SHEETING FOR MECHANICAL STRESS 7749 — SBR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 70 +/- 5 | Sh A | 10 | MPa | 1,19 | g/cm ³ | 300 | % | -25 - +80 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate for general use with the added property of increased tensile strength. Suitable for environments without special requirements for resistance to negative influences. Made on the basis of SBR rubber compound with various chemical and physical-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS


| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING FOOD GRADE 7816 — EPDM-NR



| | | | | | | | | | | | | |
|-------------|------|---------------------|-----|---------|-------------------|------------|---|----------------------|----|-----------|----|-------------|
| 60 +/- 5 | Sh A | 6 | MPa | 1,27 | g/cm ³ | 400 | % | -40 - +125 | °C | 1-10 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate made in food quality in white. It meets the requirements of Article 3 of Regulation (EC) No. 1935/2004 of 27 October 2004 on materials and articles intended to come into contact with food. Made on the basis of EPDM-NR with various physical-mechanical properties. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).

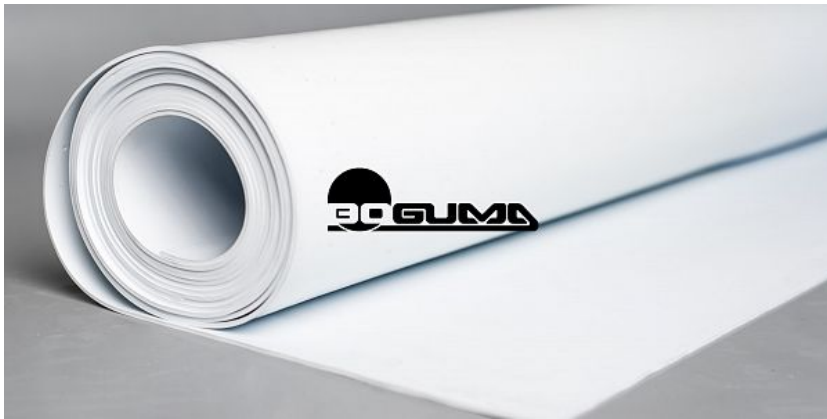

ADDITIONAL INFORMATION

color might be not stable if used outdoor

RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | HIGHLY RESISTANT |
| Ozone resistance | HIGHLY RESISTANT |
| UV resistance | HIGHLY RESISTANT |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | MEDIUM RESISTANT |
| Gasoline resistance | NO |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,8 mm) |
| 10 mm | (+/- 0,8 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |

RUBBER SHEETING WEAR RESISTANT 7750 — NBR-SBR-BR



| | | | | | | | | | | | | |
|-------------|------|---------------------|-----|---------|-------------------|------------|---|----------------------|----|-----------|----|-------------|
| 60 +/- 5 | Sh A | 17 | MPa | 1,15 | g/cm ³ | 400 | % | -25 - +70 | °C | 1-15 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate for general use with the added property of high abrasion resistance (120 mm³) and above-standard tensile strength. Made on the basis of a rubber mixture of NR, SBR and BR with various chemical and physical-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Complete the exact specification in the configurator.



RESISTANCE

| | |
|---------------------|------------------|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | MEDIUM RESISTANT |
| Acid resistance | MEDIUM RESISTANT |
| Oil resistance | NO |
| Gasoline resistance | NO |
| Abrasion resistance | HIGHLY RESISTANT |

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,8 mm) |
| 10 mm | (+/- 0,8 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

RUBBER SHEETING SOUNDPROOF 9001 — CR-NR



| | | | | | | | | | | | | |
|----------|------|------------------|-----|---------|-------------------|------------|---|-------------------|----|-----------|----|-------------|
| 65 +/- 5 | Sh A | 3 | MPa | 2,44 | g/cm ³ | 100 | % | -25 - +80 | °C | 2.5 | mm | INTERIOR |
| HARDNESS | | TENSILE STRENGTH | | DENSITY | | ELONGATION | | TEMPERATURE RANGE | | THICKNESS | | ENVIRONMENT |

Sealing plate made of a special self-extinguishing material with acoustic properties of a sound barrier. Designed for use without demands for resistance to negative environmental influences and without mechanical stress. Made on the basis of CR and NR rubbers with slight resistance to acids, alkalis and oils. In standard thickness 2.5 mm and width max 1,400 mm. Complete the exact specification in the configurator.



RESISTANCE

Alkaline resistance MEDIUM RESISTANT
 Acid resistance MEDIUM RESISTANT
 Oil resistance MEDIUM RESISTANT

CONFIGURATION OPTIONS

THICKNESS
 2.5 mm (+/- 0,3 mm)

WIDTH
 1200 mm (+/- 10 mm)

LENGTH
 10 m (+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS
 without reinforcement (for thicknesses 2.5 mm layers)

RUBBER SHEETING SOUNDPROOF 9001 — CR-NR

SOUND LOSS TM E-90

