



RUBBER SHEETING

RUBBER SHEETING

Rubber sheeting in general

Rubber sealing plates as a semi-finished product for further production of sealing and damping parts.

In eight different compositions of rubber compounds, which guarantee specific chemical and physical-mechanical properties: tensile strength, hardness, density, elongation and temperature range.

The range of our sealing plates will meet the needs of even the most demanding client: sealing plates for general use, for mechanical stress, oil-resistant, abrasion-resistant, heat-resistant, food-grade, sound-insulating and PARA rubber. You can choose your preferred combination of features and colors.

Available caoutchoucs

SBR
NBR-SBR
EPDM
EPDM-NR
NR
NR-SBR-BR
CR-SBR
CR-NR

Applications

Different types of seals after cutting / cutting
Protective curtains for sand
Rubber for hoppers
Sound insulation

AVAILABLE COLORS



AVAILABLE PROFILES

TD - smooth profile, Pattern S3



Thicknesses from 1 - 15mm.

Possibility of strengthening the internal structure with fabric in 1 or 2 layers.

AVAILABLE APPLICATIONS



7993 — SBR	4
9001 — CR-NR	5
7994 — SBR	7
7759 — SBR	8
9035 — SBR	9
7665 — SBR	10
7667 — SBR	11
7668 — SBR	12
7669 — SBR	13
7987 — CR-SBR	14
7887 — CR-SBR	15
7815 — EPDM	16
7911 — EPDM	17
7795 — EPDM	18
7796 — EPDM	19
7659 — EPDM-NR	20
7661 — EPDM-NR	21
7816 — EPDM-NR	22
7689 — NR	23
7742 — NR	24
7750 — NR-SBR-BR	25
7645 — NBR-SBR	26
7672 — NBR-SBR	28
7749 — SBR	30

RUBBER SHEETING FOR GENERAL USE

7993 — SBR



INTERIOR	1,47 g/cm ³	-25 - +80 °C	65 +/- 5	Sh A	200 %	4 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS	

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

9001 — CR-NR

RUBBER SHEETING SOUNDPROOF 9001 —
CR-NR

INTERIOR	2,44	g/cm ³	-25 - +80	°C	65 +/- 5	Sh A	100	%	3	MPa	2.5	mm
ENVIRONMENT	DENSITY		TEMPERATURE RANGE		HARDNESS		ELONGATION		TENSILE STRENGTH		THICKNESS	

Sealing plate made of a special self-extinguishing material with acoustic properties of a sound barrier. Designed for use without demands for resistance to negative environmental influences and without mechanical stress. Made on the basis of CR and NR rubbers with slight resistance to acids, alkalis and oils. In standard thickness 2.5 mm and width max 1,400 mm. Complete the exact specification in the configurator.



RESISTANCE

Alkaline resistance MEDIUM RESISTANT
Acid resistance MEDIUM RESISTANT
Oil resistance MEDIUM RESISTANT

CONFIGURATION OPTIONS

THICKNESS

2.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)


NUMBER OF REINFORCEMENT LAYERS

without reinforcement (for thicknesses 2.5 mm)
layers

9001 — CR-NR

RUBBER SHEETING SOUNDPROOF 9001 —
CR-NR

SOUND LOSS TM E-90

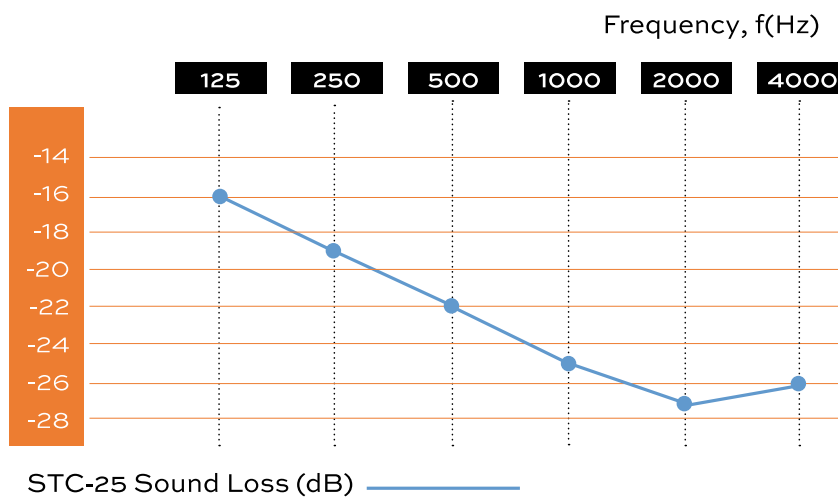

RUBBER SHEETING FOR GENERAL USE

7994 — SBR



INTERIOR	1,5	g/cm ³	-25 - +80	°C	50 +/- 5	Sh A	400	%	4	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in black color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

RUBBER SHEETING FOR GENERAL USE

7759 — SBR



INTERIOR	1,55 g/cm ³	-25 - +80 °C	80 +/- 5	Sh A	100 %	4 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS	

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)



RUBBER SHEETING FOR GENERAL USE

9035 — SBR



INTERIOR	1,51	g/cm ³	-25 - +70	°C	65 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in white color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

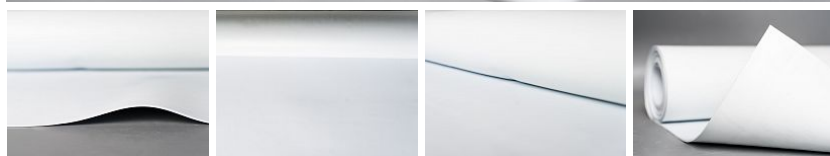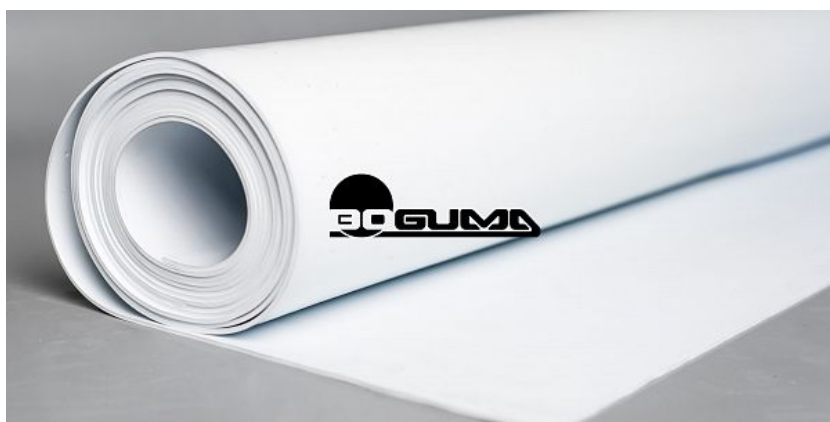

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS


without reinforcement layers	(for thicknesses 1 - 10 mm)
.....	
1 reinforcement layer	(for thicknesses 2 - 10 mm)
.....	
2 reinforcement layers	(for thicknesses 3 - 10 mm)

7665 — SBR

RUBBER SHEETING FOR GENERAL USE
7665 — SBR

INTERIOR	1,53 g/cm ³	-25 - +70 °C	65 +/- 5 Sh A	400 %	6 MPa	1-10 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in gray. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

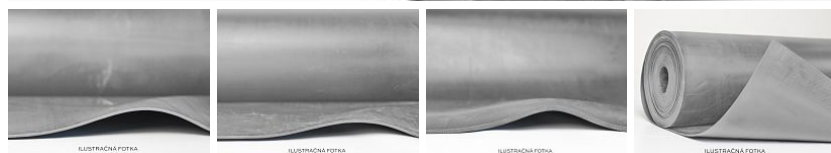

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

7667 — SBR


RUBBER SHEETING FOR GENERAL USE
7667 — SBR

INTERIOR	1,53	g/cm ³	-25 - +70	°C	65 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in green color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ILUSTRÁČNÁ FOTKA

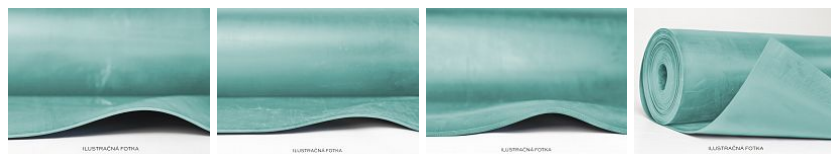

ILUSTRÁČNÁ FOTKA

ILUSTRÁČNÁ FOTKA

ILUSTRÁČNÁ FOTKA

ILUSTRÁČNÁ FOTKA

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

7668 — SBR


RUBBER SHEETING FOR GENERAL USE
7668 — SBR

INTERIOR	1,53	g/cm ³	-25 - +70	°C	65 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing rubber plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in blue color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ILUSTRACNÁ FOTKA

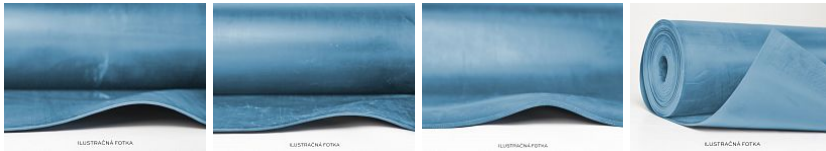

ILUSTRACNÁ FOTKA

ILUSTRACNÁ FOTKA

ILUSTRACNÁ FOTKA

ILUSTRACNÁ FOTKA

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

7669 — SBR

RED RUBBER SHEETING FOR GENERAL
USE 7669 — SBR

INTERIOR	1,53	g/cm ³	-25 - +70	°C	65 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in red. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

RUBBER SHEETING FOR GENERAL USE

7987 — CR-SBR



INTERIOR	1,4	g/cm ³	-25 - +80	°C	65 +/- 5	Sh A	300	%	8	MPa	1-15	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	MEDIUM RESISTANT
Ozone resistance	NO
UV resistance	MEDIUM RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Solvent resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement (for thicknesses 1 - 15 mm)

1 reinforcement layer (for thicknesses 2 - 15 mm)

2 reinforcement layers (for thicknesses 3 - 15 mm)

RUBBER SHEETING FOR GENERAL USE

7887 — CR-SBR



INTERIOR	1,3	g/cm ³	-25 - +80	°C	50 +/- 5	Sh A	300	%	6	MPa	1-6	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in black. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	MEDIUM RESISTANT
Ozone resistance	NO
UV resistance	MEDIUM RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Solvent resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 6 mm)
1 reinforcement layer	(for thicknesses 2 - 6 mm)
2 reinforcement layers	(for thicknesses 3 - 6 mm)

RUBBER SHEETING HEAT RESISTANT 7815 — EPDM



EXTERIOR	1,22	g/cm ³	-40 - +125	°C	60 +/- 5	Sh A	400	%	10	MPa	1-15	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

7911 — EPDM

RUBBER SHEETING HEAT RESISTANT 7911 — EPDM



EXTERIOR	1,14	g/cm ³	-40 - +125	°C	60 +/- 5	Sh A	400	%	12	MPa	1-15	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

RUBBER SHEETING HEAT RESISTANT 7795 — EPDM



EXTERIOR	1,33 g/cm ³	-40 - +100 °C	70 +/- 5	Sh A	250 %	7 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS	

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

RUBBER SEALING HEAT RESISTANT 7796 — EPDM



EXTERIOR	1,33 g/cm ³	-40 - +100 °C	80 +/- 5 Sh A	250 %	7 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

RUBBER SHEETING HEAT RESISTANT 7659 — EPDM-NR



INTERIOR	1,15	g/cm ³	-40 - +125	°C	65 +/- 5	Sh A	650	%	12	MPa	1-6	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM-NR with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)


NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 6 mm)
1 reinforcement layer	(for thicknesses 2 - 6 mm)
2 reinforcement layers	(for thicknesses 3 - 6 mm)

RUBBER SHEETING HEAT RESISTANT 7661
— EPDM-NR

INTERIOR	1,15	g/cm ³	-40 - +125	°C	65 +/- 5	Sh A	650	%	12	MPa	1-6	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate suitable for outdoor use. Resistant to high temperatures, weathering, ultraviolet radiation, acids and alkalis. Made on the basis of EPDM-NR with various physico-mechanical properties. With the possibility of specifying the required thickness (1 - 6 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

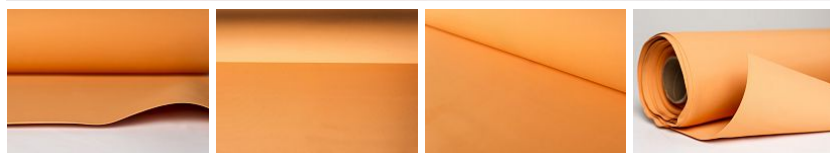

ADDITIONAL INFORMATION

color might be not stable if used outdoor

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)



NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 6 mm)
.....	
1 reinforcement layer	(for thicknesses 2 - 6 mm)
2 reinforcement layers	(for thicknesses 3 - 6 mm)

RUBBER SHEETING FOOD GRADE 7816 —
EPDM-NR

INTERIOR	1,27	g/cm ³	-40 - +125	°C	60 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate made in food quality in white. It meets the requirements of Article 3 of Regulation (EC) No. 1935/2004 of 27 October 2004 on materials and articles intended to come into contact with food. Made on the basis of EPDM-NR with various physical-mechanical properties. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).

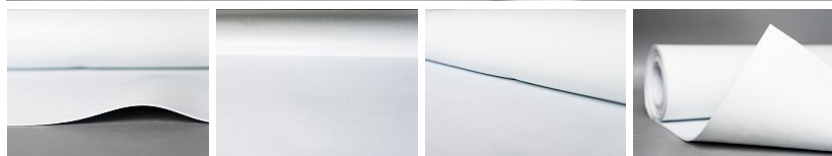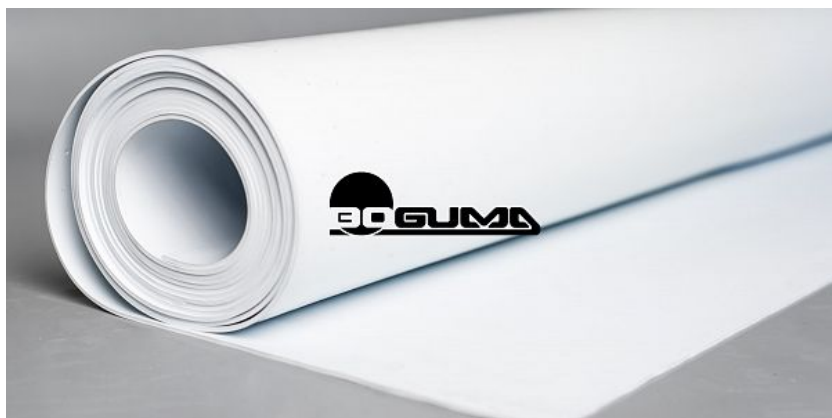

ADDITIONAL INFORMATION

color might be not stable if used outdoor

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS


without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)

RUBBER SHEETING PARA QUALITY 7689 — NR



INTERIOR	1	g/cm ³	-25 - +70	°C	40 +/- 5	Sh A	600	%	12	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate high-strength and highly elastic with increased abrasion resistance. Made on the basis of natural rubber NR with various physical and mechanical properties. With the possibility of specifying the thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

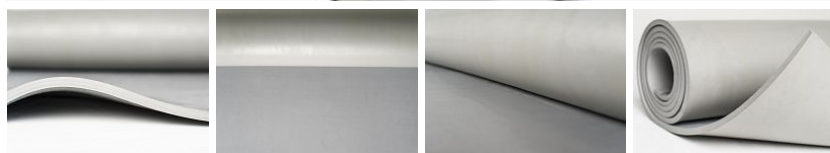

RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement	(for thicknesses 1 - 10 mm)
-----------------------	-----------------------------

7742 — NR

RUBBER SHEETING PARA QUALITY 7742 — NR



INTERIOR	< 1,00	g/cm ³	-25 - +70	°C	40 +/- 5	Sh A	500	%	12	MPa	1-6	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate high-strength and highly elastic with increased abrasion resistance. The density of 7742 is less than 1 g / cm³, which means that it is a lighter material than water. Made on the basis of natural rubber NR with various physical and mechanical properties. With the possibility of specifying the thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement	(for thicknesses 1 - 6 mm)
-----------------------	----------------------------

RUBBER SHEETING WEAR RESISTANT 7750 — NR-SBR-BR



INTERIOR	1,15 g/cm ³	-25 - +70 °C	60 +/- 5	Sh A	400 %	17 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS	

Sealing plate for general use with the added property of high abrasion resistance (120 mm³) and above-standard tensile strength. Made on the basis of a rubber mixture of NR, SBR and BR with various chemical and physical-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Complete the exact specification in the configurator.



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Gasoline resistance	NO
Abrasion resistance	HIGHLY RESISTANT

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

RUBBER SHEETING OIL RESISTANT 7645 — NBR-SBR



INTERIOR	1,65 g/cm ³	-25 - +80 °C	65 +/- 5	Sh A	200 %	3 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS	

Sealing plate designed for the environment in which it comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made from a synthetic mixture of NBR-SBR rubbers with suitable properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance NO
Acid resistance NO
Oil resistance HIGHLY RESISTANT
Gasoline resistance MEDIUM RESISTANT

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)


NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)

7645 — NBR-SBR

RUBBER SHEETING OIL RESISTANT 7645 — NBR-SBR

7645 SWELLING RATES

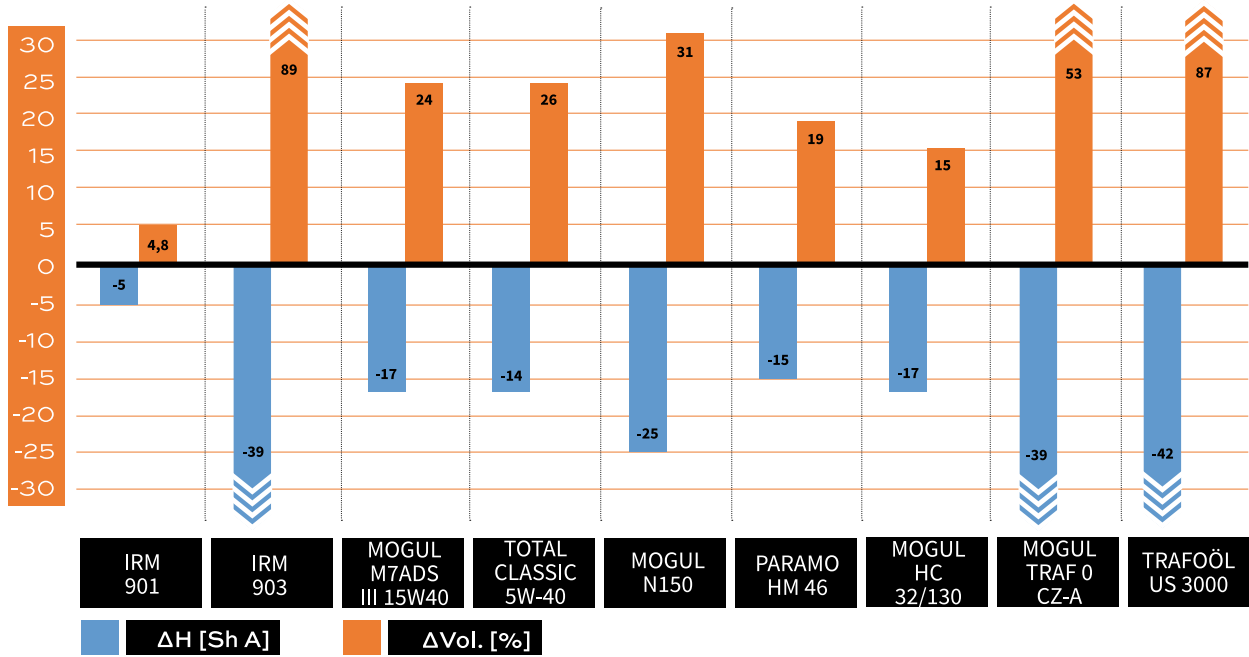

RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR



INTERIOR	1,3	g/cm ³	-25 - +100	°C	70 +/- 5	Sh A	250	%	8	MPa	1-15	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate designed for the environment in which it comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made from a synthetic mixture of NBR-SBR rubbers with suitable properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



ADDITIONAL INFORMATION

Temperature range -25/+100 °C

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS


without reinforcement (for thicknesses 1 - 15 mm)

1 reinforcement layer (for thicknesses 2 - 15 mm)

2 reinforcement layers (for thicknesses 3 - 15 mm)

RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR

7672 SWELLING RATES

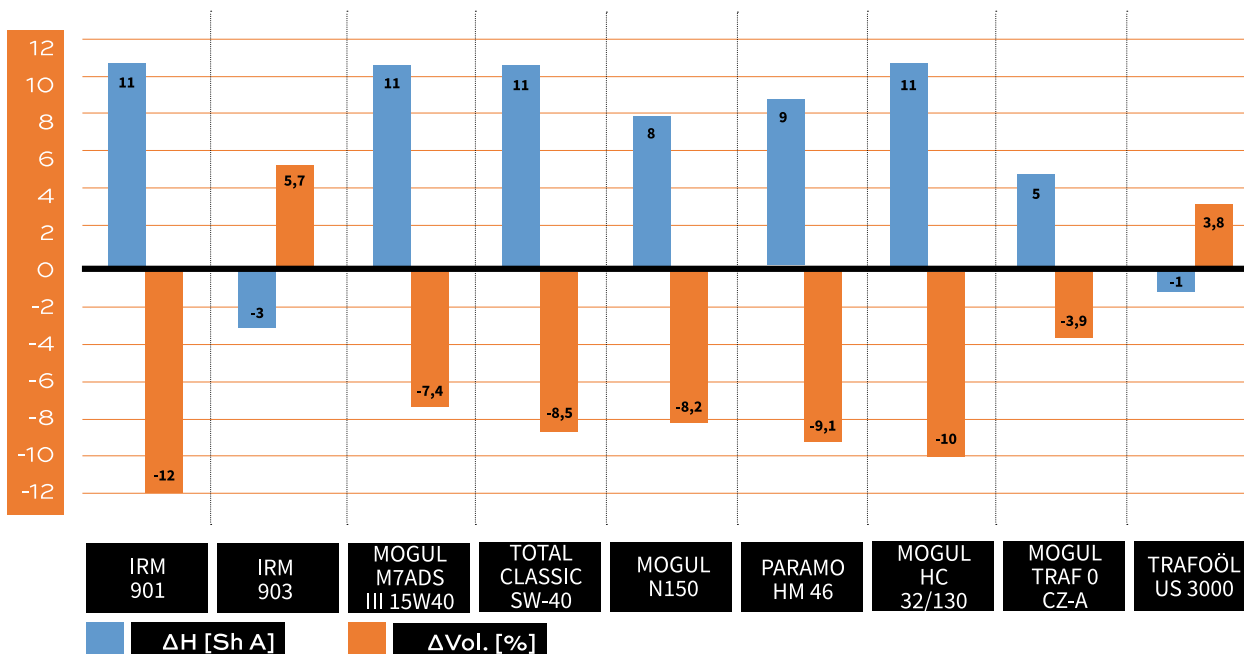

7749 — SBR

RUBBER SHEETING FOR MECHANICAL STRESS 7749 — SBR



INTERIOR	1,19 g/cm ³	-25 - +80 °C	70 +/- 5 Sh A	300 %	10 MPa	1-15 mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS

Sealing plate for general use with the added property of increased tensile strength. Suitable for environments without special requirements for resistance to negative influences. Made on the basis of SBR rubber compound with various chemical and physical-mechanical properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).



RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	NO
Gasoline resistance	NO

CONFIGURATION OPTIONS

THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)
15 mm	(+/- 1,0 mm)

WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)
5 m	(+/- 200 mm)

NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 15 mm)
1 reinforcement layer	(for thicknesses 2 - 15 mm)
2 reinforcement layers	(for thicknesses 3 - 15 mm)