


# RUBBER SHEETING FOOD GRADE 7816 — EPDM-NR



60 +/- 5	Sh A	6	MPa	1,27	g/cm <sup>3</sup>	400	%	-40 - +125	°C	1-10	mm	INTERIOR
HARDNESS		TENSILE STRENGTH		DENSITY		ELONGATION		TEMPERATURE RANGE		THICKNESS		ENVIRONMENT

Sealing plate made in food quality in white. It meets the requirements of Article 3 of Regulation (EC) No. 1935/2004 of 27 October 2004 on materials and articles intended to come into contact with food. Made on the basis of EPDM-NR with various physical-mechanical properties. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs).

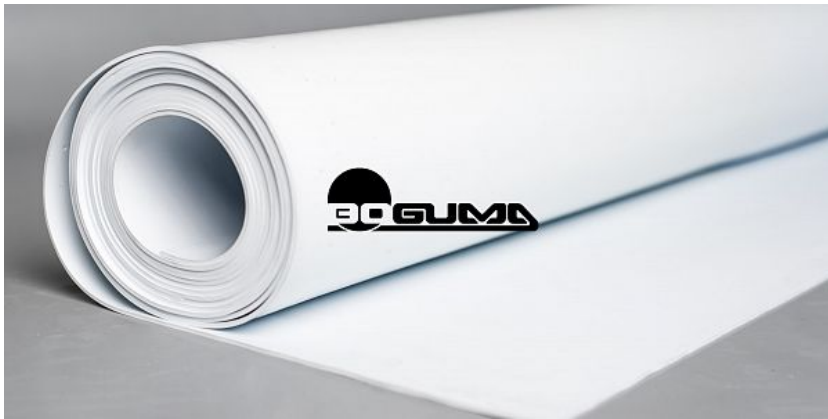

## ADDITIONAL INFORMATION

color might be not stable if used outdoor

## RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	MEDIUM RESISTANT
Acid resistance	MEDIUM RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

## CONFIGURATION OPTIONS

### THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,8 mm)
10 mm	(+/- 0,8 mm)

### WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

### LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

### NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
1 reinforcement layer	(for thicknesses 2 - 10 mm)
2 reinforcement layers	(for thicknesses 3 - 10 mm)