



RUBBER FLOORING WIDE RIBBED — S1- SBR-COLOR



| | | | | | | |
|--------------------|-----------------|-------------|------------------|-----------|---------------------|-------------------------|
| INTERIOR | 80 +/- 5 | Sh A | 4 | mm | 4.5-4.8 | kg/m² |
| ENVIRONMENT | HARDNESS | | THICKNESS | | BASIS WEIGHT | |

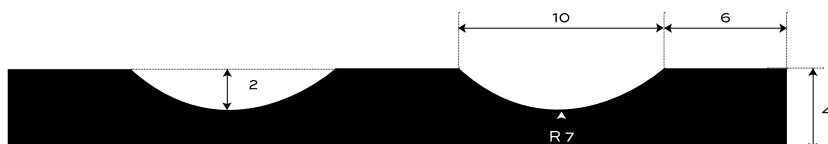

Bottom side - cloth impression

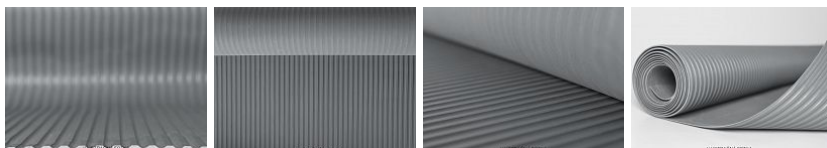

ADDITIONAL INFORMATION

Temperature range -25/+80 °C

RESISTANCE

| | |
|---------------------|----|
| Weather resistance | NO |
| Ozone resistance | NO |
| UV resistance | NO |
| Alkaline resistance | NO |
| Acid resistance | NO |
| Oil resistance | NO |
| Gasoline resistance | NO |

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S1 type, in the basic design in three colors: gray, blue and green. In standard thickness of 4 mm. It weighs 4.8 kg / m². Finish your specification in configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)