



RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45



INTERIOR ENVIRONMENT	65 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.6 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

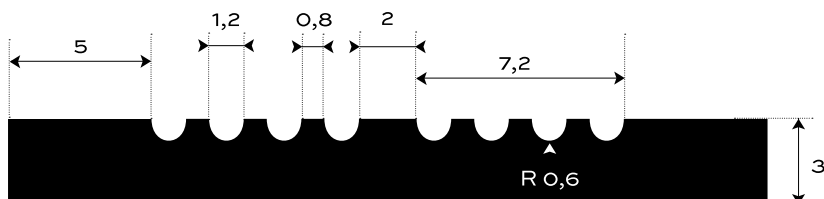

Bottom side - cloth impression

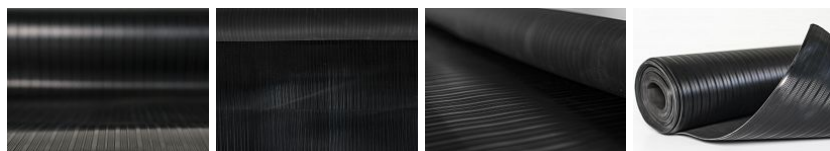

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

S2 — NBR45

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45

7645 SWELLING RATES

