



RUBBER FLOORING FINE RIBBED — S2-SBR-STD



INTERIOR ENVIRONMENT	80 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.2 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

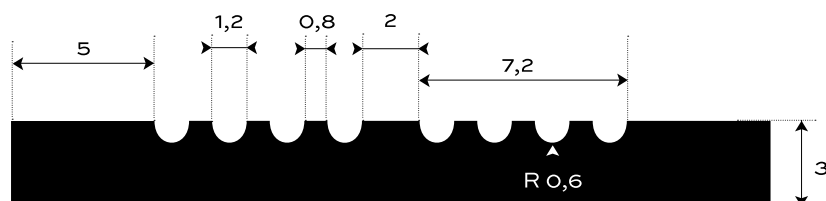

Bottom side - cloth impression

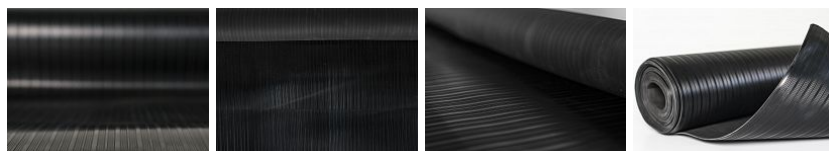

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in black. In standard thickness 3 mm. It weighs 4.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------