



# RUBBER FLOORING WIDE RIBBED — S4-EPDM15



|                 |          |             |           |           |              |                         |
|-----------------|----------|-------------|-----------|-----------|--------------|-------------------------|
| <b>EXTERIOR</b> | 60 +/- 5 | <b>Sh A</b> | 6         | <b>mm</b> | 6.1          | <b>kg/m<sup>2</sup></b> |
| ENVIRONMENT     | HARDNESS |             | THICKNESS |           | BASIS WEIGHT |                         |



Bottom side - cloth impression

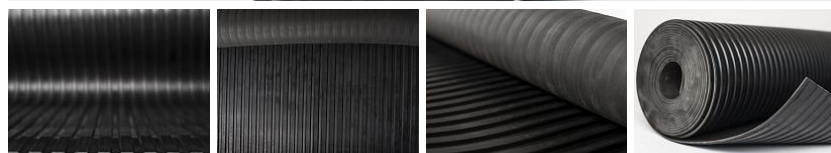

## ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

## RESISTANCE

|                     |                  |
|---------------------|------------------|
| Weather resistance  | HIGHLY RESISTANT |
| Ozone resistance    | HIGHLY RESISTANT |
| UV resistance       | HIGHLY RESISTANT |
| Alkaline resistance | HIGHLY RESISTANT |
| Acid resistance     | HIGHLY RESISTANT |
| Oil resistance      | MEDIUM RESISTANT |
| Gasoline resistance | NO               |

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.1 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

6 mm (+/- 0,5 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)