



RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45



INTERIOR	65 +/- 5	Sh A	6	mm	8.2	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			



Bottom side - cloth impression

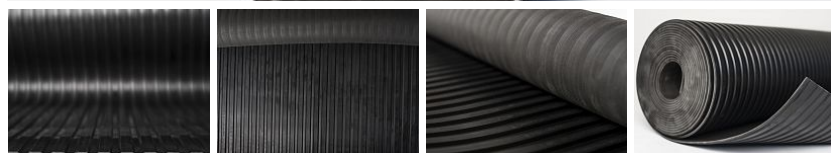

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 8.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

S4 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45

7645 SWELLING RATES

