



# RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72



<b>INTERIOR</b>	70 +/- 5 <b>Sh A</b>	3 <b>mm</b>	3.5 <b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>	<b>THICKNESS</b>	<b>BASIS WEIGHT</b>

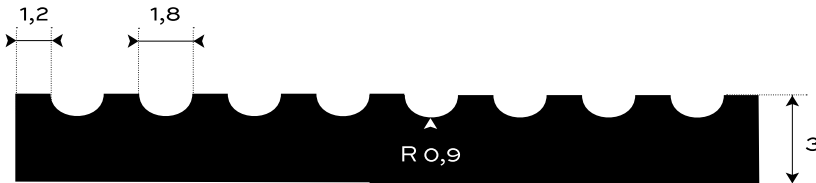

Bottom side - cloth impression

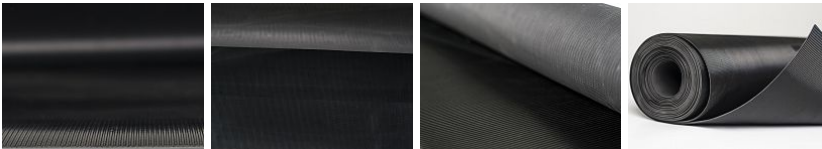

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine ribbed pattern type S5, oil-resistant in black color. In standard thickness 3 mm. It weighs 3.5 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

3 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)

# RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72

## 7672 SWELLING RATES

