



RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45



INTERIOR	65 +/- 5	Sh A	3.5	mm	4.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

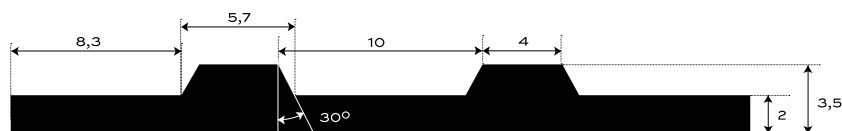

Bottom side - cloth impression

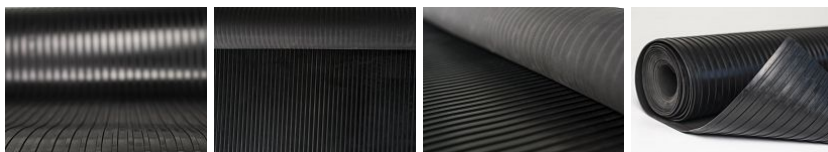

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 4.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

S6 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-
RESISTANT - S6-NBR45

7645 SWELLING RATES

