


S6 — SBR-BLACK


# RUBBER FLOORING WIDE RIBBED — S6-SBR-STD



<b>INTERIOR</b>	80 +/- 5 <b>Sh A</b>	3.5 <b>mm</b>	4.1 <b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>	<b>THICKNESS</b>	<b>BASIS WEIGHT</b>

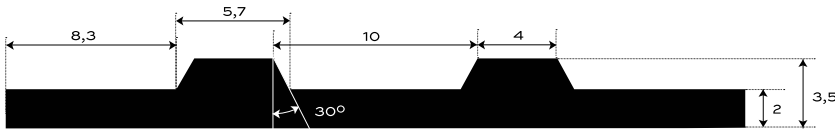

Bottom side - cloth impression

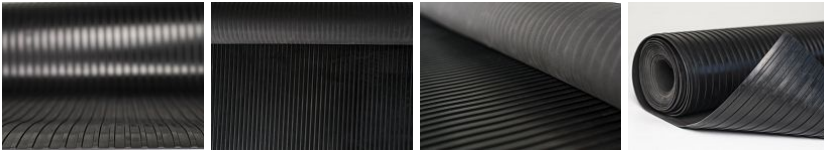

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

## RESISTANCE

Weather resistance NO  
 Ozone resistance NO  
 UV resistance NO  
 Alkaline resistance NO  
 Acid resistance NO  
 Oil resistance NO  
 Gasoline resistance NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, in the basic design in black color. In standard thickness 3.5 mm. It weighs 3.9 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

3.5 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)