



# RUBBER SHEETING FOR GENERAL USE

## 9035 — SBR



INTERIOR	1,51	g/cm <sup>3</sup>	-25 - +70	°C	65 +/- 5	Sh A	400	%	6	MPa	1-10	mm
ENVIRONMENT	DENSITY	TEMPERATURE RANGE	HARDNESS	ELONGATION	TENSILE STRENGTH	THICKNESS						

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of SBR rubber compound in white color. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

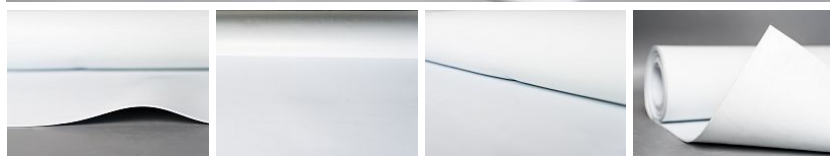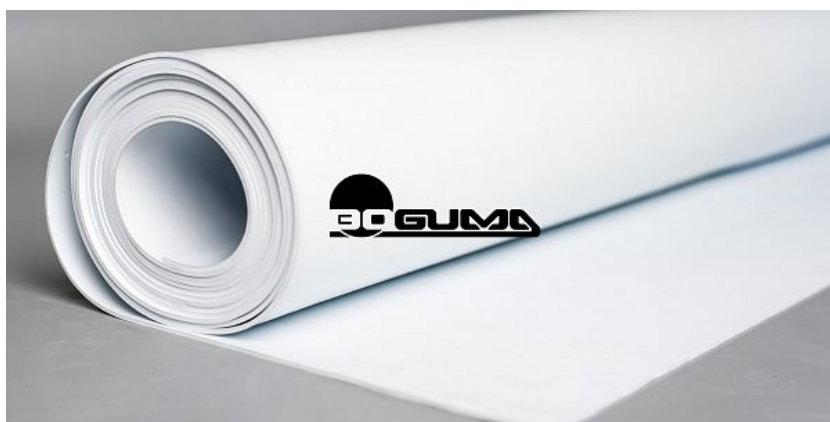

### RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

### CONFIGURATION OPTIONS

#### THICKNESS

1 mm	(+/- 0,2 mm)
1.5 mm	(+/- 0,2 mm)
2 mm	(+/- 0,2 mm)
3 mm	(+/- 0,3 mm)
4 mm	(+/- 0,4 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

#### WIDTH

1200 mm	(+/- 10 mm)
1400 mm	(+/- 10 mm)

#### LENGTH

20 m	(+/- 200 mm)
10 m	(+/- 200 mm)

#### NUMBER OF REINFORCEMENT LAYERS

without reinforcement layers	(for thicknesses 1 - 10 mm)
.....	
1 reinforcement layer	(for thicknesses 2 - 10 mm)
=====	
2 reinforcement layers	(for thicknesses 3 - 10 mm)